





TELECRANE[®]
Lee's Hi-Tech Ent. Co.,Ltd.

F24 Industrial Radio Remote Controller

Reliable - High Performance - Economic

- Durable nylon-fiber housing for extra shock resistance
- Low power consumption with 2 AA batteries (last up to 2 months in normal operation)
- Operating range up to 100 meters
- Programmable function setting through Windows-based software
- Economic efficiency, ease of operation
- Pre-wiring standard cable making wiring procedures easier
- 100% compatible components reducing stock of spare part
- Safety features: 4.3 billion unique ID code
Hamming code
Enhanced watch-dog circuit

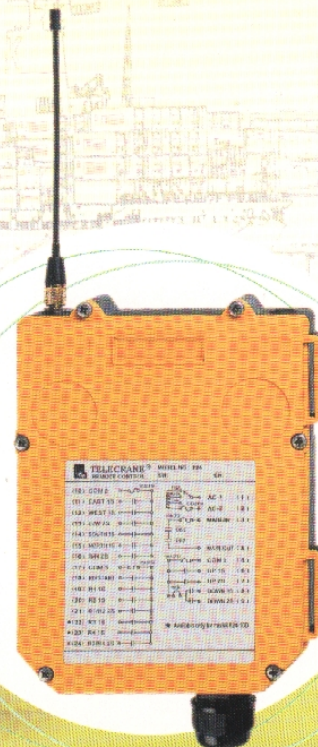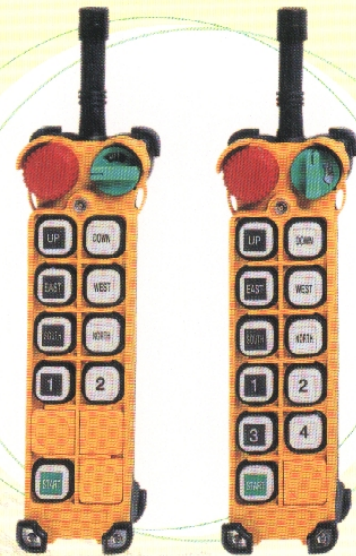

**Radio Control System best for
Crane/mobile/forestry application/lift equipment**

● **F24-8 Series**

- 8 Single/double step button
- 1 Emergency button
- 1 Start pushbutton
- 1 Rotary key switch



● **F24-10 Series**

- 10 Single/double step button
- 1 Emergency button
- 1 Start pushbutton
- 1 Rotary key switch




● **F24 Receiver**




Optional Accessories

| | |
|-----------------------|--|
| Operating Temp. | -35°C ~ +80°C |
| Maximum range | 100 M |
| TX power supply | 2 AA size Alkaline batteries |
| RX power supply | AC 48/110/220/380 V DC 12~24 V |
| Protection class | IP 65 Industrial standard |
| ID Code | 4.3 billion (32 bit) |
| Hamming Distance | ≥ 4 |
| TX Dimension & Weight | 186 x 61 x 51 mm Apprx. 255g (w/o batteries) |
| RX Dimension & Weight | 200x162x107mm Apprx. 1220g (w/o cable) |


Optional Accessories



· CD Software & Program Cable



· Copier



· Passive Antenna



· Transmitter Protective Cover

Other TELECRANE® radio series



- *6/12 single/double step pushbuttons and 5 step double joystick type
- *PLL Synthesizer radio frequency control



- *2/4/6 single/double step pushbuttons
- *AC power supply is suitable for small crane/chain hoist
- *Also available with DC power supply (12~24VDC) suitable for mobile application